



# Installation Instruction for Sliding Glass Door System

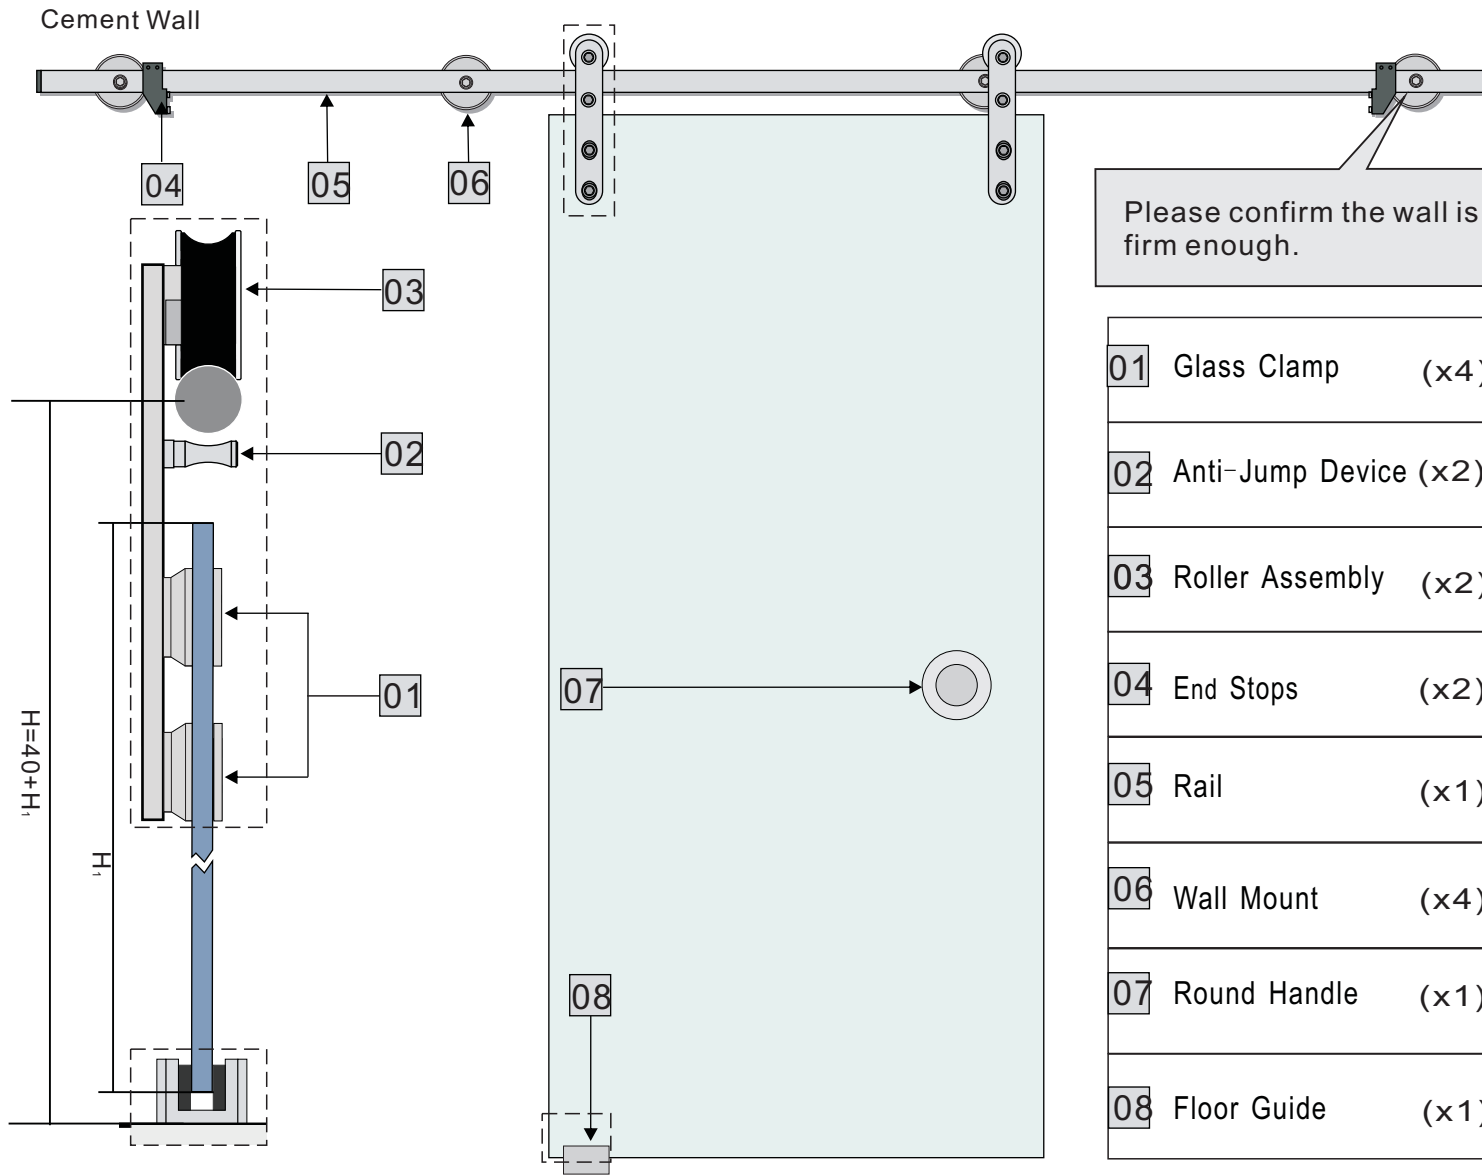

Recommended thickness range of glass door is 8-10mm

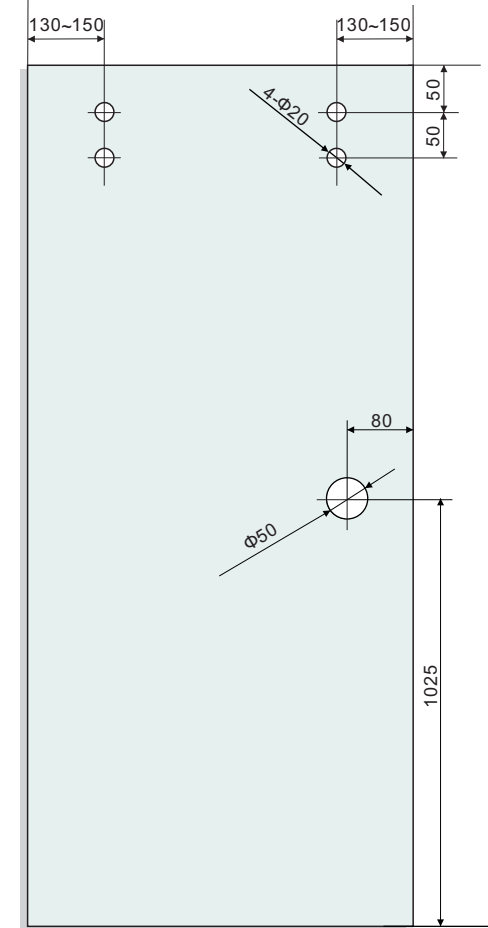

Floor Guide

You need to ensure the floor guide is adjusted correctly for 8mm or 10mm glass.  
if you need to adjust, push the plastic part partially out of the metal and turn until in the correct position marked 8mm or 10mm.

# Installation Instruction for Sliding Glass Door System

**IMPORTANT, THIS SYSTEM SHOULD BE ATTACHED TO A SOLID WALL USING APPROPRIATE FIXINGS OR A SUITABLY REINFORCED STUD WALL.**

<b>1</b> Calculate the height required for the wall holes(see page 1) and drill $\phi 12\text{mm}$ & 60mm deep at 4 equal intervals. It is absolutely imperative that these holes are at the exact same height so check carefully before drilling.	<b>2</b> Put expansion screw into holes and extrude warhead of expanding nut with hammer.	<b>3-1</b> Using four mounts fix the rail on the cement wall. Tighten the screws by Allen key and check the rail is fixed and solid.	<b>3-2</b> Take above picture of mount as a reference when installing the mounts on the wall.	<b>4</b> Using the adjustable pin wrench supplied unscrew the assemblies as shown and install in the glass ensuring the pin wrench tightens the assembly correctly.	<b>5</b> Rejoin the main body of the roller assemblies and fix firmly into position using the screws and allen key. Note there is an amount of adjustment available so ensure the glass is not stressed.
<b>6</b> It is a two person job to then hang the glass on the rail, be careful with the glass especially the corners ensuring they don't catch anything hard. It is always advisable to put some cardboard/carpet underneath the working area.	<b>7</b> Install the anti-jump device with the allen key and fix firmly.	<b>8</b> Slide the end stops onto the rail and make sure they are on the correct way.	<b>9</b> Try to slide the glass door slightly and adjust position and angle of door stoppers till the rubber on door stoppers can touch middle of roller, then tighten screws.(Please adjust the position of floor guide if there is any problem of the sliding system on horizontal plane.)	<b>10</b> Fix the door guide to the finished floor. It should be positioned just before the beginning of the passage opening approx. middle of the door movement. The distance from the wall to the centers of the fixing holes should be 10mm assuming a flush wall.	<b>11</b> Install round handle. Finish the whole installation.

**\*Please note you are responsible for the correct installation of this unit so please ensure you pay particular attention to these instructions AND those that are supplied with the glass door.**